
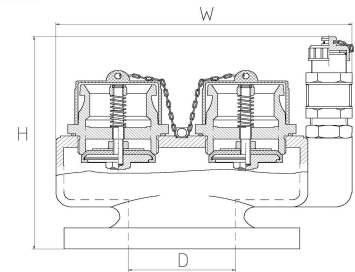


2-Way & 4-Way Inlet Breechings For Dry Risers



Type	Size	H	W	Inlet	Outlet
2-Way	DN100	235mm	320mm	BS336	220mm
4-Way	DN150	255mm	340mm	BS336	285mm

SPECIFICATION

- ❖ Breeching inlet test and certificate complying with BS 5041-3
- ❖ Licence/Certificate C1153Id (Approve by LPCB)
- ❖ Ductile Casting body, Wall thickness $\geq 3.5\text{mm}$
- ❖ RAL3000 polyester epoxy Powder coating, Inner thickness $\geq 100\mu\text{m}$, outer thickness $\geq 200\mu\text{m}$
- ❖ Outlet Flange complying with BS 4504-2 16/21
- ❖ The Flange to blank cap $\leq 260\text{mm}$
- ❖ Inlets copper alloy LG2 with non-return valve
- ❖ 2-way inlet connections spaced $\geq 115\text{mm}$
- ❖ 4-way inlet connections spaced $\geq 150\text{mm}$
- ❖ Stainless steel spring & lock nut
- ❖ DN25 Drain valve complying with BS 5154
- ❖ Plastic blank cap with chain
- ❖ Vertical or Horizontal mounting
- ❖ Non-return valves Test 1.7 bar
- ❖ Working pressure 20 bar, Test pressure 30 bar

ADDITIONAL ACCESSORIES - Inlet Breechings Cabinet



Type	H	W	D
2-Way	395mm	595mm	295mm
4-Way	595mm	595mm	295mm
2-Way (Wall Mounted)	600mm	400mm	300mm

SPECIFICATION

- ❖ Cabinet Material: Mild steel or Stainless steel
- ❖ Glass: Wire meshed reinforcement
- ❖ Finish: Red Powder Coating or Stainless steel color
- ❖ Installation: Recessed or Wall Mounting